


# Stainless steel centrifugal pumps

REIHE 60-68

FOR GENERAL AND PROCESSING INDUSTRIES

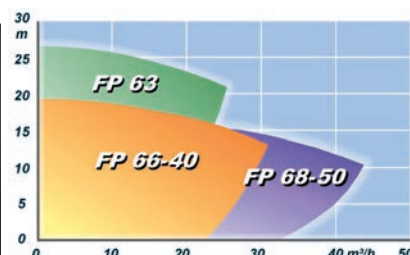



The Packo pump series 60-68 includes the pump types: 61, 62, 63, 66 and 68 with capacities ranging from 0,55 till 2,2 kW. They are available in 2 versions FP for the food industries and NP for the processing industries. Derived from the FP and NP models are the SCP and ISP series of selfpriming pumps. These comprise the same component parts with a different pump casing.

# Functionally designed


## MATERIALS AISI 316 L ELECTROLYTICALLY POLISHED

Standard practice on all Packo pumps resulting in:

- Improved hygiene.
- Smoother finish for easier cleaning; greater efficiency.
- More resistant to corrosion and erosion attack thanks to the higher concentrations of chromium and nickel at the surface and the total absence of micro-deformities which finishing or glass-blasting can cause

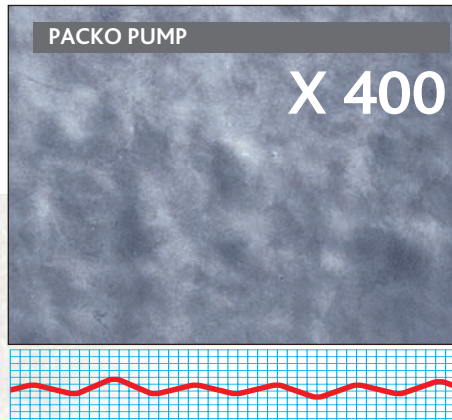

• Linished 240 grit





• Glass-blasted

## OPEN IMPELLER


- Non clogging.
- Excellent air handling.
- Simple to clean (spring is not in contact with the liquid).

*Close coupled to an IEC STANDARD MOTOR.  
Lantern with large ports for fast evacuation  
of leakage.*

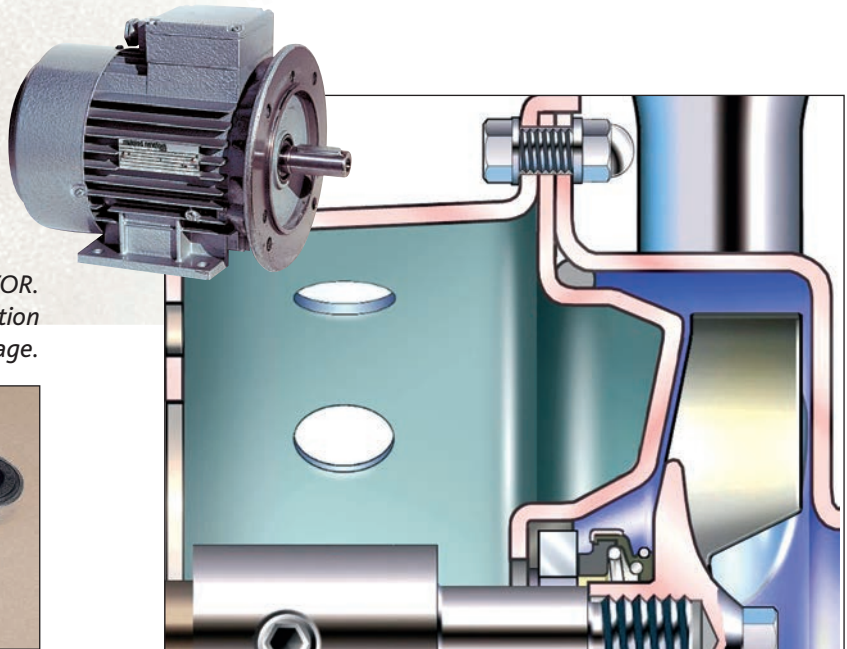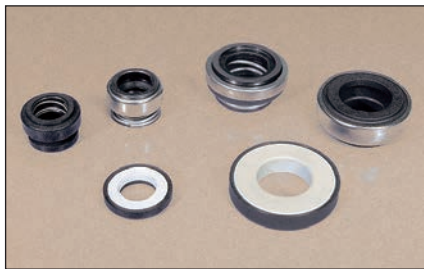

## ADAPTED TO YOUR MACHINE

Models for different applications are available:  
Extra short motor, special in- and outlets, assembly  
with motor on top, explosion proof motors.

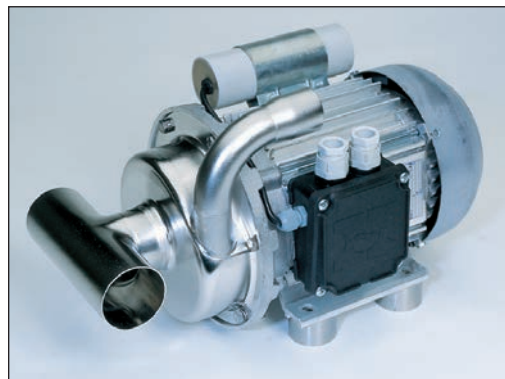

PACKO INOX NV – BRANCH DIKSMUIDE  
Industriepark Heernisse  
Cardijnlaan 10  
B-8600 Diksmuide (Belgium)  
E-mail: [diksmuide@packo.com](mailto:diksmuide@packo.com)

Tel.: (+ 32) (0) 51 51 92 80  
Fax: (+ 32) (0) 51 51 92 99  
<http://www.packopumps.com>